Disassembling GravityLight Front Panel

Prerequisite Only

Written By: Michallynn Hoffman



TOOLS:

- Phillips #00 Screwdriver (1)


Step 1 — Removing the Front Panel





- Flip the GravityLight on its back and place it on a sturdy surface.
- Unscrew the three 2cm Phillips #00 screws on the back of the GravityLight's body.

Step 2 — Opening the Device Housing

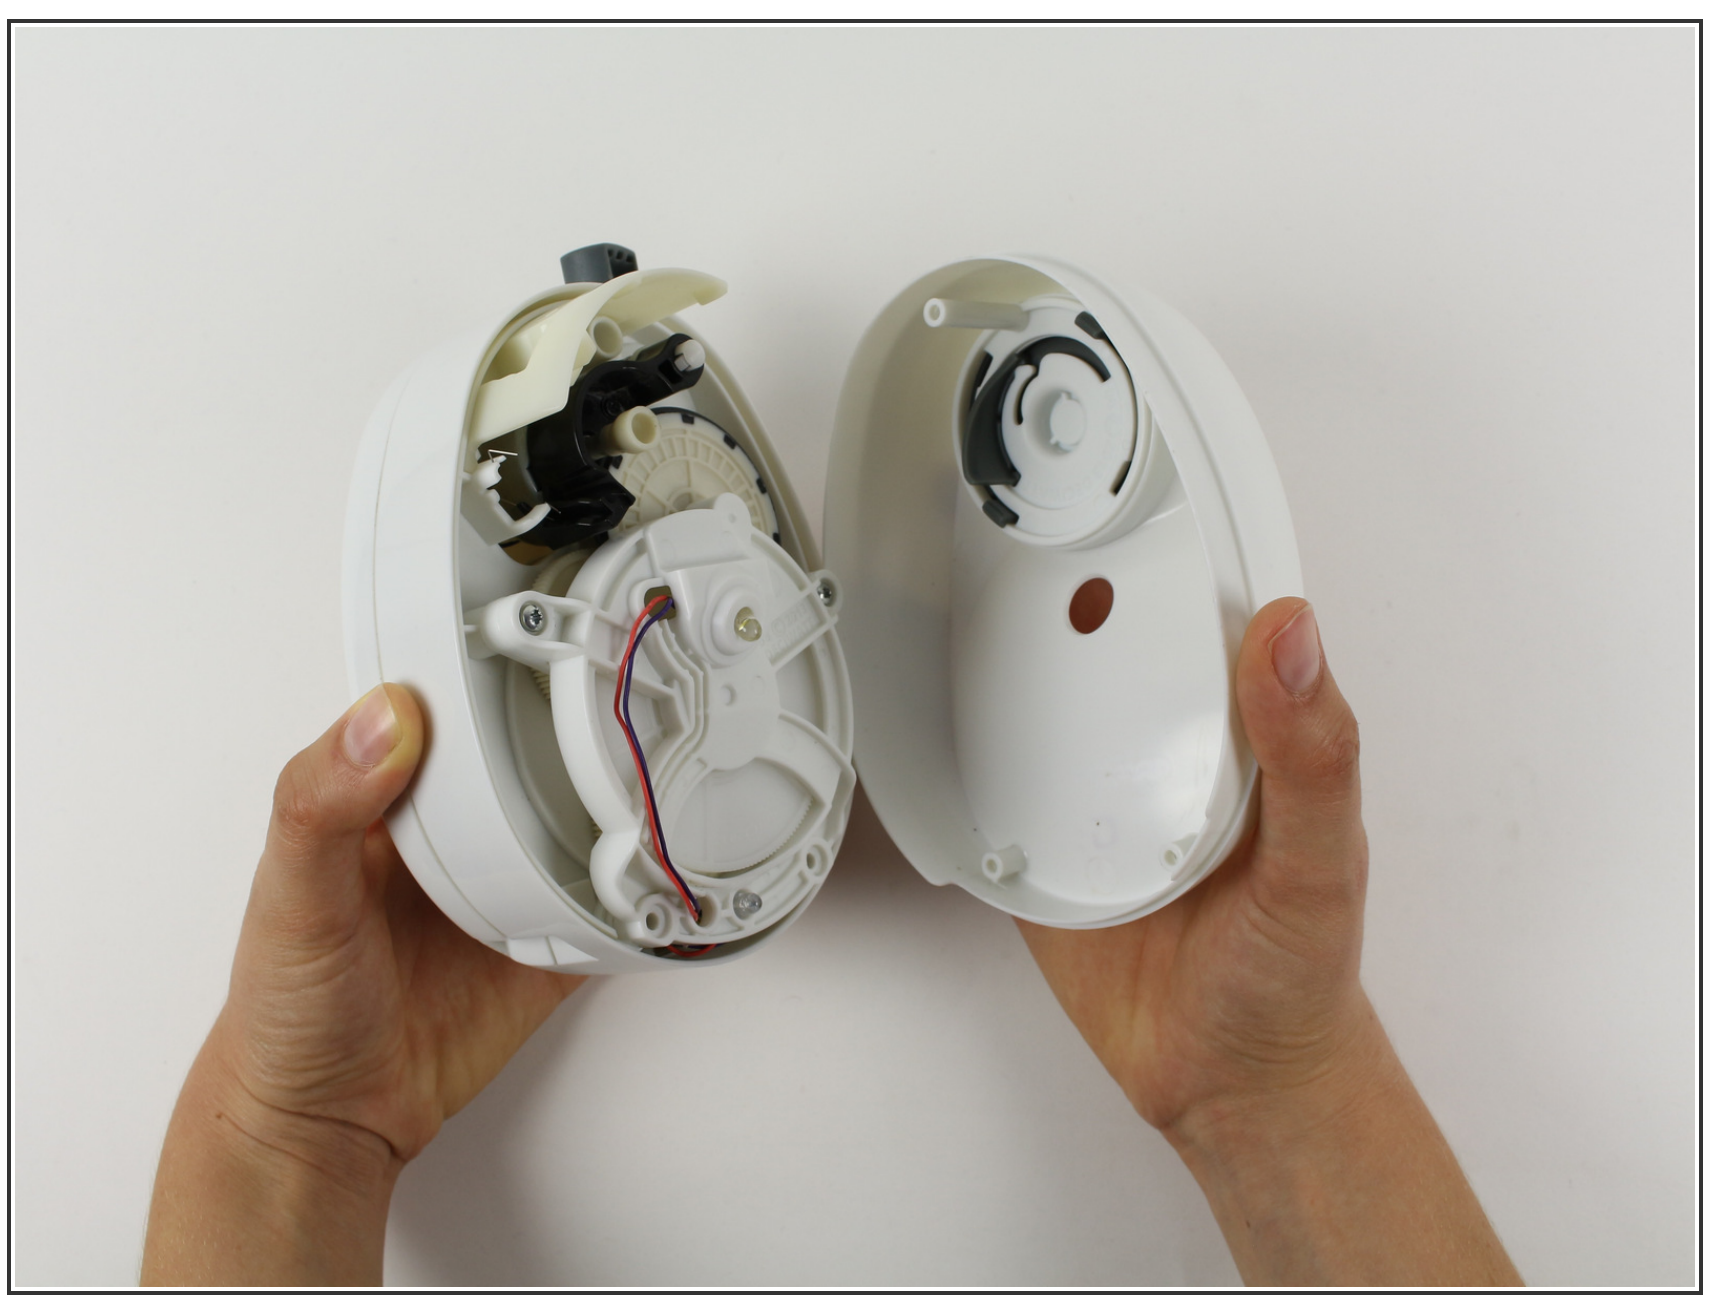

⚠ Some of the internal pieces may loosen or fall out during disassembly.

- Firmly grasp both parts of the GravityLight body and pull them apart.

To reassemble your device, follow these instructions in reverse order.